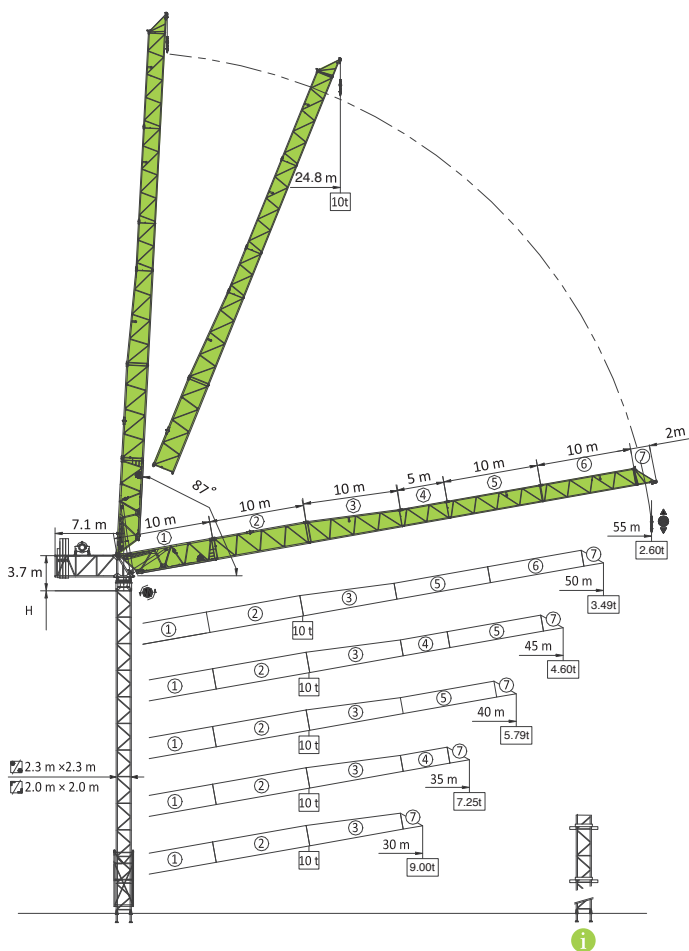


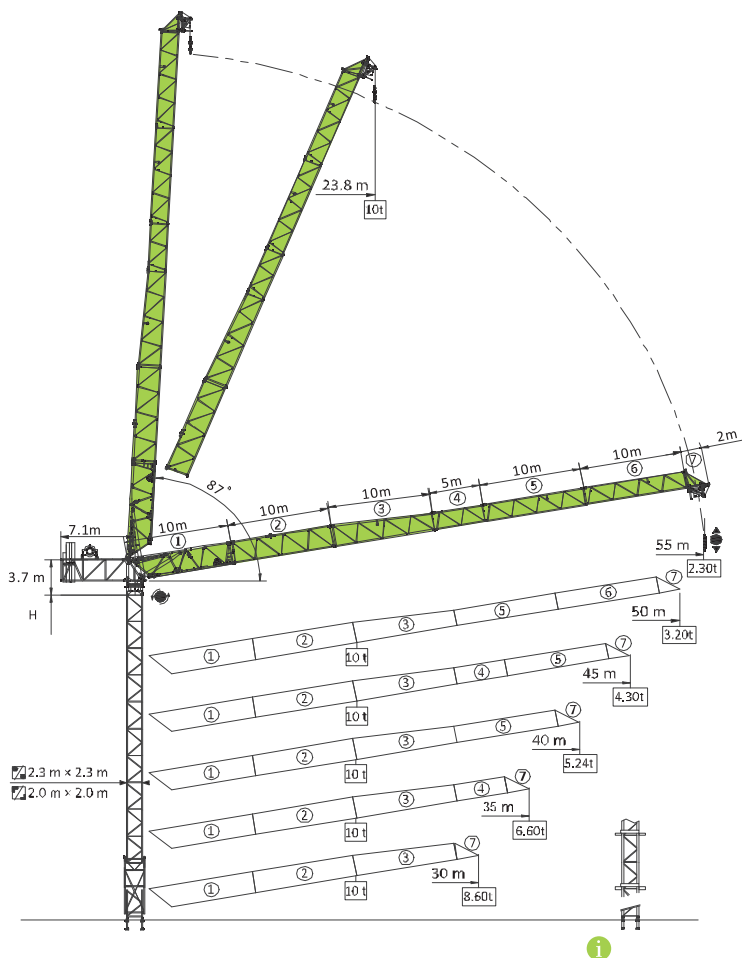
RL205-10

动臂模式 (无小车) / Luffing mode (excl. trolley)

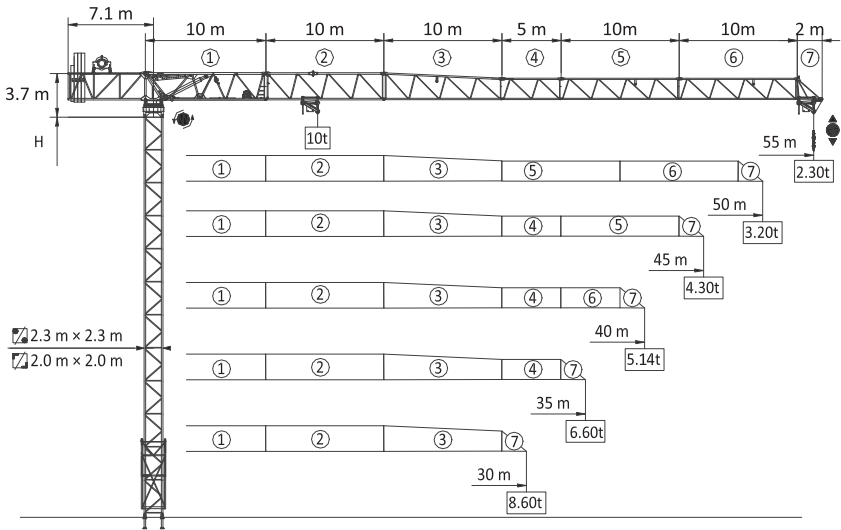


RL205-10

动臂模式 (有小车) / Luffing mode (incl. trolley)

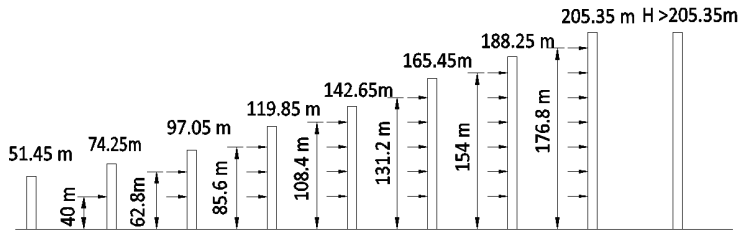
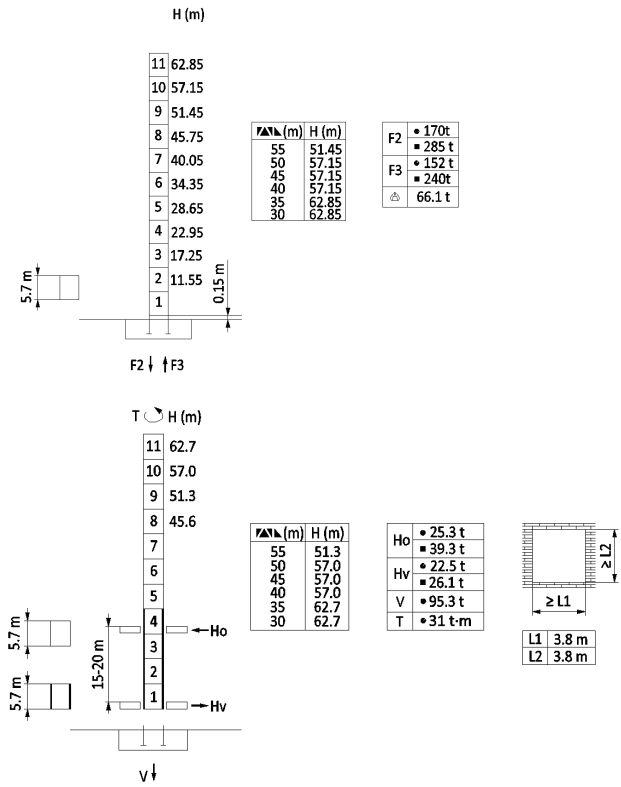


平臂模式/ Trolleying mode



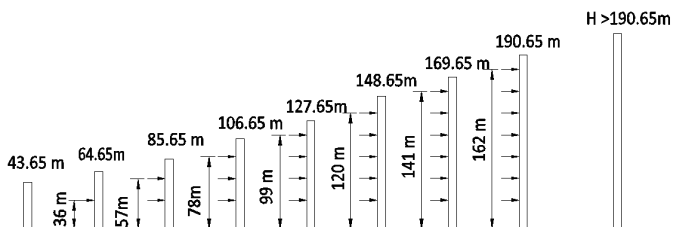
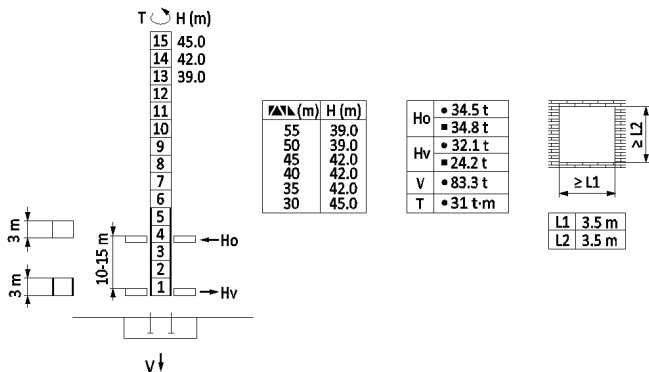
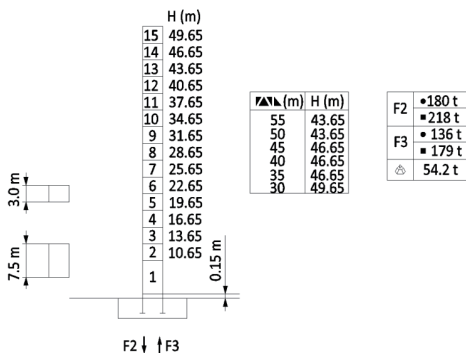
塔身-反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

 2.3m – RB R205-10RB

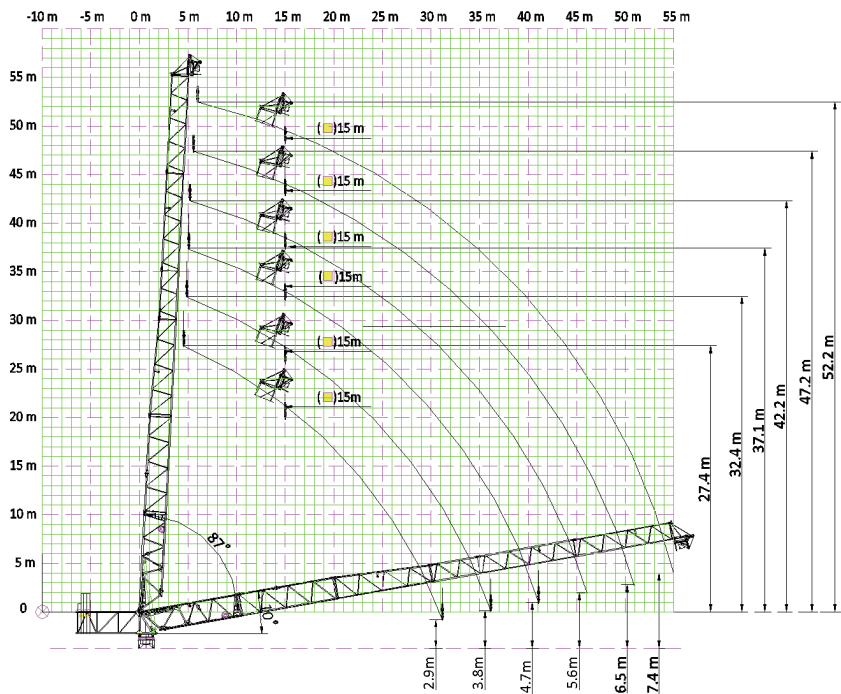


Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen / 塔身-反力&附着

2.0m – L68 RL205-10E



起重臂 / Luffing jib / Ausleger in Steilstellung



Load diagrams – Luffing mode (excl. trolley) / 起重性能—动臂模式（无小车）

ㄱ—ㄴ—ㄷ—ㄹ

크레인 m	m / t	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0
55	ㄱ	5.10-55.0/2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50
	ㄴ	5.10-39.3/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.95	4.45	4.01	3.62	3.26	2.95
	ㄷ	5.10-30.0/7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	6.85	6.10	5.44	4.87	4.37	3.92	3.55	3.20	2.90	2.55
	ㄹ	5.10-24.8/10.0	10.0	10.0	10.0	10.0	10.0	9.97	8.68	7.64	6.77	6.00	5.36	4.80	4.30	3.87	3.48	3.13	2.83
50	ㄱ	4.84-50.0/2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50		
	ㄴ	4.84-41.8/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.90	4.42	3.99	3.49		
	ㄷ	4.84-32.6/7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	6.72	6.00	5.38	4.83	4.35	3.93	3.45		
	ㄹ	4.84-26.0/10.0	10.0	10.0	10.0	10.0	10.0	9.57	8.43	7.46	6.63	5.92	5.30	4.76	4.28	3.86	3.39		
45	ㄱ	4.57-45.0/2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50				
	ㄴ	4.57-43.8/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.60				
	ㄷ	4.57-33.7/7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.21	6.45	5.79	5.21	4.54				
	ㄹ	4.57-27.7/10.0	10.0	10.0	10.0	10.0	10.0	10.0	8.95	7.90	7.13	6.37	5.69	5.14	4.49				
40	ㄱ	4.31-40.0/2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50						
	ㄴ	4.31-40.0/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00						
	ㄷ	4.31-32.6/7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.21	6.45	5.79						
	ㄹ	4.31-26.0/10.0	10.0	10.0	10.0	10.0	10.0	10.0	8.95	8.00	7.13	6.37	5.71						
35	ㄱ	4.05-35.0/2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50									
	ㄴ	4.05-35.0/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00									
	ㄷ	4.05-34.1/7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.25								
	ㄹ	4.05-27.6/10.0	10.0	10.0	10.0	10.0	10.0	10.0	8.96	8.00	7.15								
30	ㄱ	3.78-30.0/2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50	2.50									
	ㄴ	3.78-30.0/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00										
	ㄷ	3.78-30.0/7.50	7.50	7.50	7.50	7.50	7.50	7.50	7.50										
	ㄹ	3.78-28.5/10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.00										

Load diagrams – Luffing mode (incl. trolley) / 起重性能—动臂模式（有小车）

ㄱ—ㄴ

크레인 m	m / t	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0
55	ㄱ	5.10-37.5/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.54	4.05	3.60	3.21	2.86	2.55	2.30
	ㄴ	5.10-23.8/10.0	10.0	10.0	10.0	10.0	10.0	9.48	8.24	7.20	6.33	5.59	4.95	4.38	3.89	3.46	3.07	2.73	2.43
50	ㄱ	4.84-39.6/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.46	3.98	3.56	3.20		
	ㄴ	4.84-25.0/10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.05	7.92	6.97	6.16	5.46	4.85	4.31	3.85	3.43	3.09	
45	ㄱ	4.57-41.6/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.81	4.30				
	ㄴ	4.57-26.7/10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.60	8.48	7.48	6.55	5.88	5.24	4.70	4.20			
40	ㄱ	4.31-40.0/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00					
	ㄴ	4.31-25.1/10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.60	8.48	7.48	6.55	5.88	5.24					
35	ㄱ	4.05-35.0/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00								
	ㄴ	4.05-26.3/10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.64	8.50	7.50	6.60							
30	ㄱ	3.78-30.0/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00										
	ㄴ	3.78-27.1/10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.70	8.60									

起重性能—平臂模式 / Load diagrams – Trolley mode / Lastkurven



ⒺⒻⒼⒽ

ⒺⒻⒼⒽ m		m / t	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0
55	ⒺⒻⒼⒽ	3.20-29.9/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.98	4.52	4.13	3.79	3.50	3.24	3.01	2.80	2.62	2.45	2.30
	ⒺⒻⒼⒽ	3.20-16.1/10.0	10.0	10.0	9.22	7.91	6.90	6.09	5.44	4.90	4.44	4.05	3.71	3.42	3.16	2.93	2.72	2.54	2.37	2.22
50	ⒺⒻⒼⒽ	3.20-34.7/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.95	4.56	4.21	3.91	3.64	3.41	3.20		
	ⒺⒻⒼⒽ	3.20-18.9/10.0	10.0	10.0	10.0	9.37	8.19	7.25	6.49	5.86	5.33	4.87	4.48	4.14	3.83	3.57	3.33	3.11		
45	ⒺⒻⒼⒽ	3.20-39.7/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.95	4.61	4.30				
	ⒺⒻⒼⒽ	3.20-21.5/10.0	10.0	10.0	10.0	10.0	9.52	8.45	7.58	6.85	6.24	5.72	5.27	4.87	4.53	4.22				
40	ⒺⒻⒼⒽ	3.20-40.0/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00					
	ⒺⒻⒼⒽ	3.20-22.5/10.0	10.0	10.0	10.0	10.0	10.0	8.88	7.96	7.21	6.57	6.02	5.55	5.14						
35	ⒺⒻⒼⒽ	3.20-35.0/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00								
	ⒺⒻⒼⒽ	3.20-24.3/10.0	10.0	10.0	10.0	10.0	10.0	9.69	8.70	7.88	7.19	6.60								
30	ⒺⒻⒼⒽ	3.20-30.0/5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00										
	ⒺⒻⒼⒽ	3.20-26.2/10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.49	8.60										








Mechanisms / Antriebe / 传动机构

380 V (± 10 %) 50 Hz															kW	
	H37FC25-530F	t	0.625	1.25	2.5	1.25	2.5	5	2.5	5	10	37	530 m 			
		m/min	190	152	76	95	76	38	47.5	38	19					
	S110CA-130LA12/14A	r/min	0 – 0.7											11		
	T55FC70-b(D)	m/min	0 ~ 75											5.5		
	YG320/270	min	2.0 (10° - 87°)											37		
			90.5 kW													





Counter-jib ballast / Gegenauslegerballast / 平衡重

 m	6.5t	5.5t	 (t)	PHZ6500	PHZ2500
55.0	3	1	25	 (mm)	 (mm)
50.0	3	1	25		
45.0	3	1	25		
40.0	3	1	25		
35.0	3	1	25		
30.0	3	1	25		





运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger		8.26	1.30	2.51	6100
起重臂节 Jib section Auslegerelement	 ①	10.51	1.15	2.45	4600
	 ②	10.22	1.15	2.38	2000
	 ③	10.20	1.15	2.35	1660
	 ④	5.18	1.15	1.88	650
	 ⑤	10.18	1.15	1.84	1050
	 ⑥	2.68	1.15	1.83	850
	 ⑦	5.18	1.15	1.84	270
吊钩 Pulley block Hakenflashe		1.08	0.36	1.61	340
司机室 Cabin Kabine		2.16	1.79	2.26	500
起升机构 Hoisting mechanism Hubwerk	 H37FC25-530F	1.95	1.06	0.87	1332
变幅机构 Trolleying mechanism Katzfahrwerk	 T55FC70-b(D)	1.16	0.73	0.60	300
载重小车 Trolley Laufkatze		1.53	1.34	1.53	410
回转塔身 Slewing mast Drehelement		2.82	2.29	1.70	6200

Dimensions and weight / Abmessungen und Gewicht / 运输单元

塔身 / Crane tower / Kranturm – L48			L (m)	B (m)	H (m)	kg (±5%)
爬升架 Climbing tower section Kletterturmstück		2.0 m	7.23	3.40	2.81	4000
标准节 (4片) Tower section (4 pieces) Turmstück (4 Stücke)		2.0 m - L68A1A	3.27	0.70	2.10	1630
标准节 Tower section Turmstück		2.0 m - L68G23-C	7.76	2.10	2.10	4200
支腿 Fixing angles Fundamentanker			1.19	0.55	0.55	4×190
泵站 Pump			0.78	0.60	1.15	225

运输单元 / Dimensions and weight / Abmessungen und Gewicht

塔身 / Crane tower / Kranturm –RB		L (m)	B (m)	H (m)	kg (±5%)
爬升架 Climbing tower section Kletterturmstück	 2.82 m	11.6	2.85	2.88	6420
标准节 Tower section Turmstück	 2.3 m – RB	5.91	2.30	2.30	3160
	 2.3 m – RBJ	5.91	2.30	2.30	3390
支腿 Fixing angles Fundamentanker	 1.72	1.72	0.55	0.55	4×310
泵站 Pump	 0.78	0.78	0.60	1.15	225